


INSTALLATION INSTRUCTIONS & SPECIFICATIONS


- 1- Locate the best position to install the door viewer. Ideally at eye level (approximately 5 feet)
- 2- Use a 1/8" drill bit to make a pilot hole completely through the door. Keep the drill horizontal
- 3- Use the proper bit size, as determined by the size of the Inner lens Cylinder, to drill the hole halfway, then move to the other side of the door and drill through the other half. Keep the drill horizontal.
- 4- Disassemble the door viewer by rotating the inner lens cylinder counter clockwise while holding the Outer lens cover section.
- 5- Insert the Outer lens Cover section from outside of the door, then screw the inner lens cylinder from the inside of the door clockwise while holding the Outer lens cover section until the viewer is tight.



XTRASCOPE SERIES PEEPHOLES

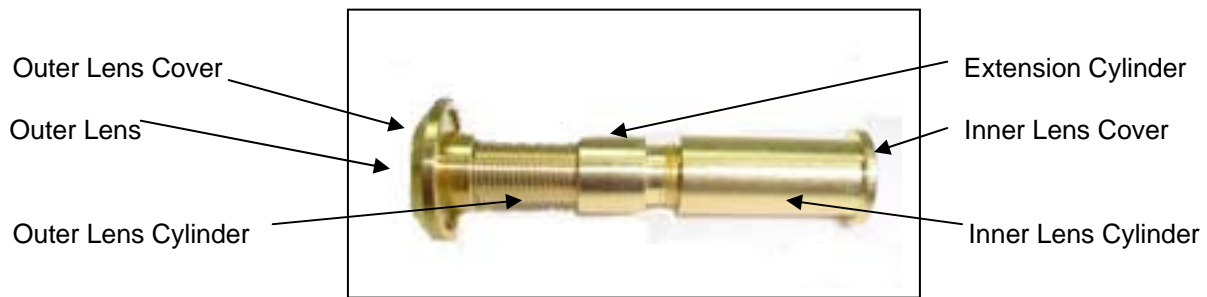

EZVIEW SERIES VIEWERS

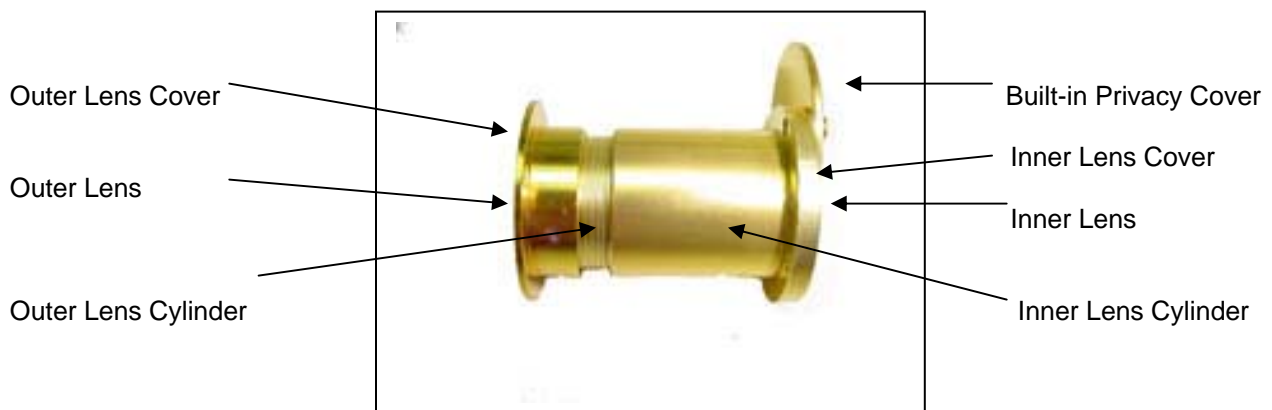

PEEPHOLES & DOOR VIEWERS SPECIFICATIONS

MODEL	OUTER LENS COVER DIAMETER	INNER LENS CYLINDER DIAMETER **	INNER LENS COVER DIAMETER	DOOR WIDTH RANGE
EZVIEW 26D503C	35mm (1 3/8")	26mm (1 1/16")	35mm (1 3/8")	1 3/8" – 2 1/8"
EZVIEW-BR 26D503B	35mm (1 3/8")	26mm (1 1/16")	35mm (1 3/8")	1 1/2" - 2 3/8"
EZVIEW-EX 26D507C	35mm (1 3/8")	26mm (1 1/16")	35mm (1 3/8")	2 3/4" – 3 1/2"
EZVIEW-XL 26D504C	35mm (1 3/8")	26mm (1 1/16")	35mm (1 3/8")	1 7/8" – 2 3/4"
EZVIEW-LL 26D526C	40mm (1 9/16")	28mm (1 1/8")	40mm (1 9/16")	5 3/8" – 8.0"
EZVIEW2 26D302B	35mm (1 3/8")	26mm (1 1/16")	35mm (1 3/8")	1 1/2" – 2 1/8"
EZVIEW-EX2 26D307B	35mm (1 3/8")	26mm (1 1/16")	35mm (1 3/8")	2 7/8" – 3 1/2"
MINISCOPE 14D914C	35mm (1 3/8")	14mm (9/16")	17mm (1 1/16")	3/4" – 1 3/8"
MINIVIEW 26D825C	32mm (1 1/4")	24mm (15/16")	32mm (1 1/4") 28mm (1 1/8")	1/2" – 1 3/8"
NUSCOPE 26D301B	35mm (1 3/8")	26mm (1 1/16")	35mm (1 3/8")	1 1/4" – 2 .0"
WIDESCOPE-EX 27D827C	38mm (1 1/2")	28mm (1 1/8")	38mm (1 1/2")	1 3/4" – 2 1/8"
WIDESCOPE-EX 27D827C + 1 EXT	38mm (1 1/2")	28mm (1 1/8")	38mm (1 1/2")	2 1/2" – 3.0"
XTRASCOPE 14D214C	26mm (1 1/16")	14mm (9/16")	17mm (1 1/16")	1 3/8" – 2 1/4"
XTRASCOPE 14D214C + 1 EXT	26mm (1 1/16")	14mm (9/16")	17mm (1 1/16")	1 3/4" – 2 7/8"
XTRASCOPE PLUS 19D218C (BRASS)	30mm (1 3/8")	18mm (3/4")	23mm (7/8")	2 1/8" – 4 1/2"
XTRASCOPE PLUS 19D218C (SILVER)	30mm (1 3/8")	17mm (5/8")	30mm (1 3/8")	2 3/4" – 4 3/8"

** The dimension of the Inner Lens Cylinder will determine the size of the opening required for installations.